

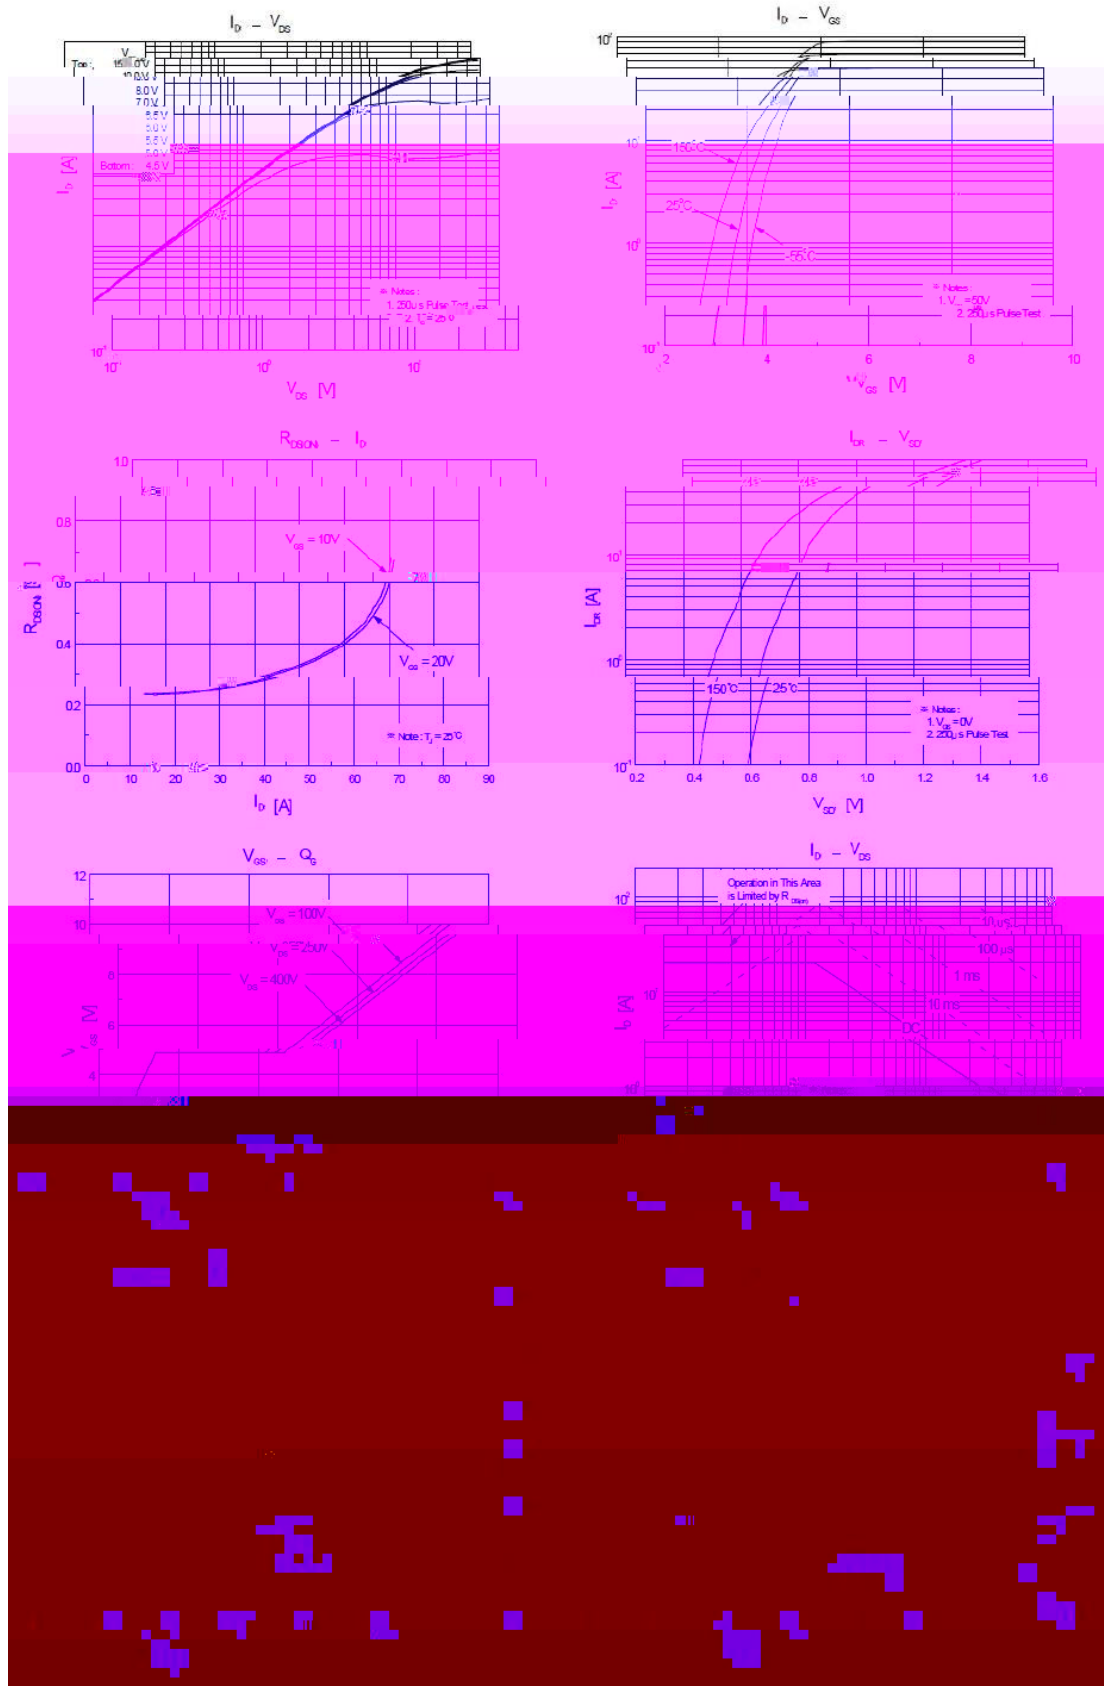


H, ll d , Ā Ĥ ŷ ō , Š Ĩ , gy2gw Ĩ τ Ā


[illegible]PIN 3  $\chi$  S

$v''\Omega$   
Parameter

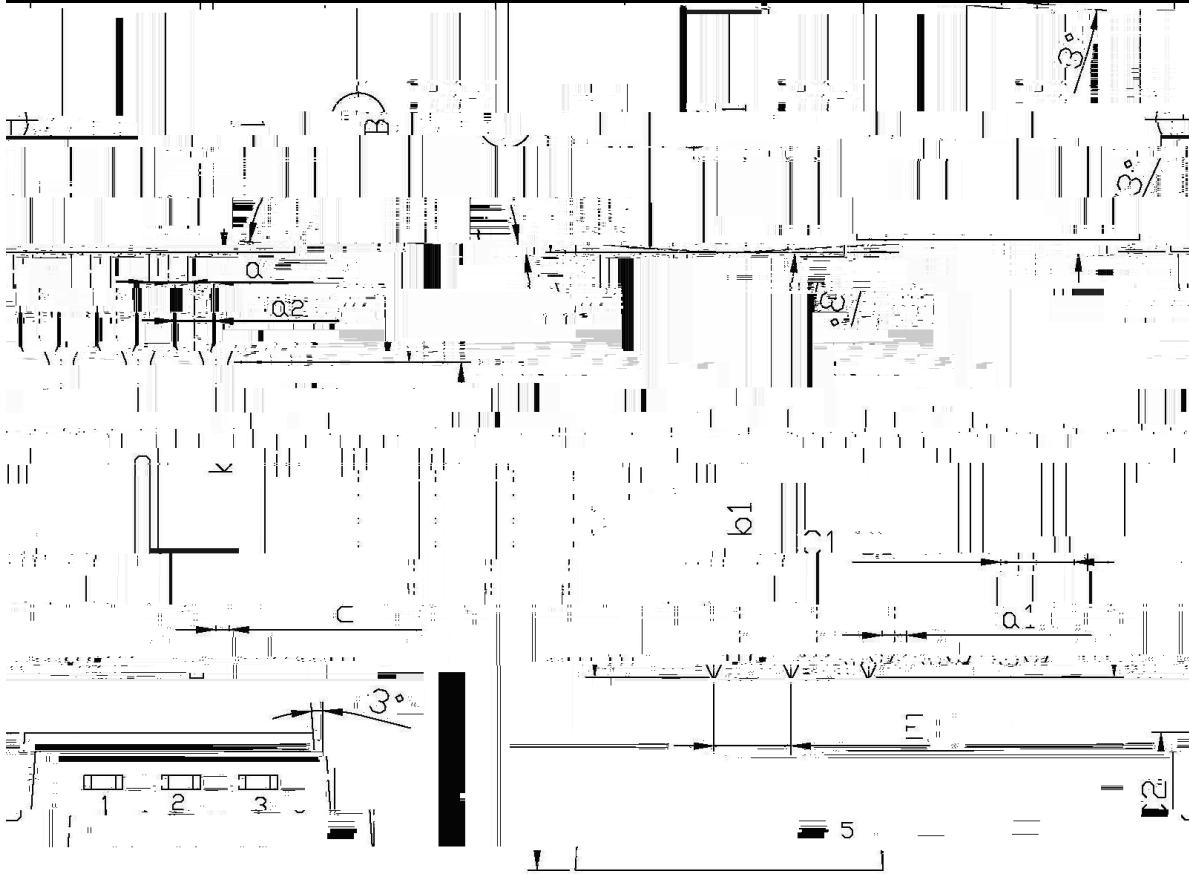



| Dimensions in Millimeters |       |       |       | Dimensions in Millimeters |       |       |       |
|---------------------------|-------|-------|-------|---------------------------|-------|-------|-------|
| Symbol                    | Min   | Max   | Typ   | Symbol                    | Min   | Max   | Typ   |
| a                         | 14.5  | 14.5  | 14.5  | a                         | 10.2  | 10.2  | 10.2  |
| a/2                       | 7.25  | 7.25  | 7.25  | a/2                       | 5.1   | 5.1   | 5.1   |
| b                         | 15.7  | 15.7  | 15.7  | b                         | 9.4   | 9.4   | 9.4   |
| b/2                       | 7.85  | 7.85  | 7.85  | b/2                       | 4.7   | 4.7   | 4.7   |
| c                         | 16.1  | 16.1  | 16.1  | c                         | 9.0   | 9.0   | 9.0   |
| c/2                       | 8.05  | 8.05  | 8.05  | c/2                       | 4.5   | 4.5   | 4.5   |
| d                         | 1.45  | 1.45  | 1.45  | d                         | 1.25  | 1.25  | 1.25  |
| d/2                       | 0.725 | 0.725 | 0.725 | d/2                       | 0.625 | 0.625 | 0.625 |

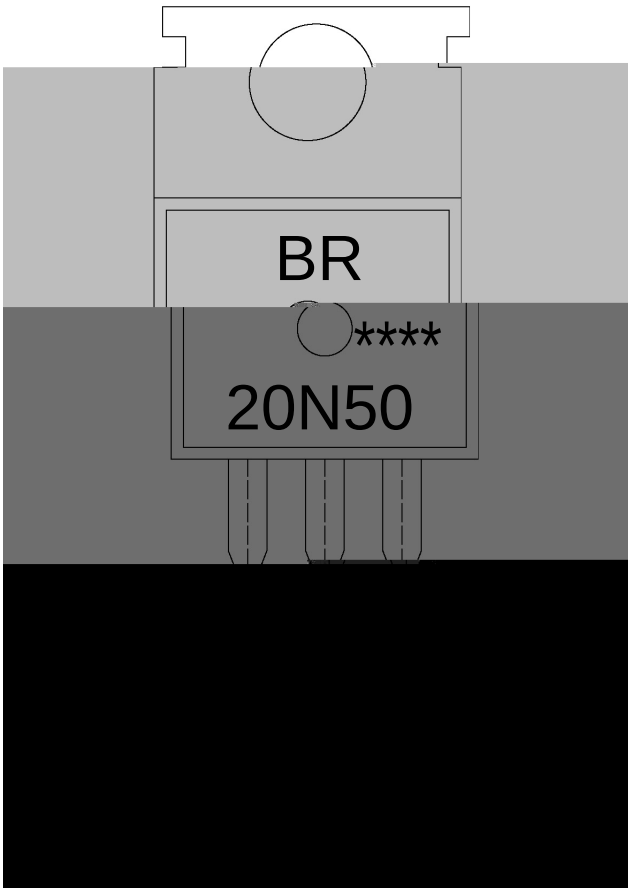

|         |                                        |
|---------|----------------------------------------|
| ” X     |                                        |
| BR X    | 公司代码                                   |
| 53Q83 X | 产品型号                                   |
| ---- X  | 批次代码 或 批次代码                            |
| Note:   |                                        |
| BR:     | Company Code                           |
| 20N50:  | Product Type.                          |
| ****:   | Lot No. Code, code change with Lot No. |



” X  
1 25 150 60 90sec;

Note:  
1.Preheating:25~150