

BR4N60

/ /


GF2GF

/ Absolute Maximum Ratings(Ta=25)



/ Electrical Characteristics(Ta=25)

		μ				
						μ
						μ
						μ
		μ				
						Ω
		Ω				


/ Electrical Characteristic Curve

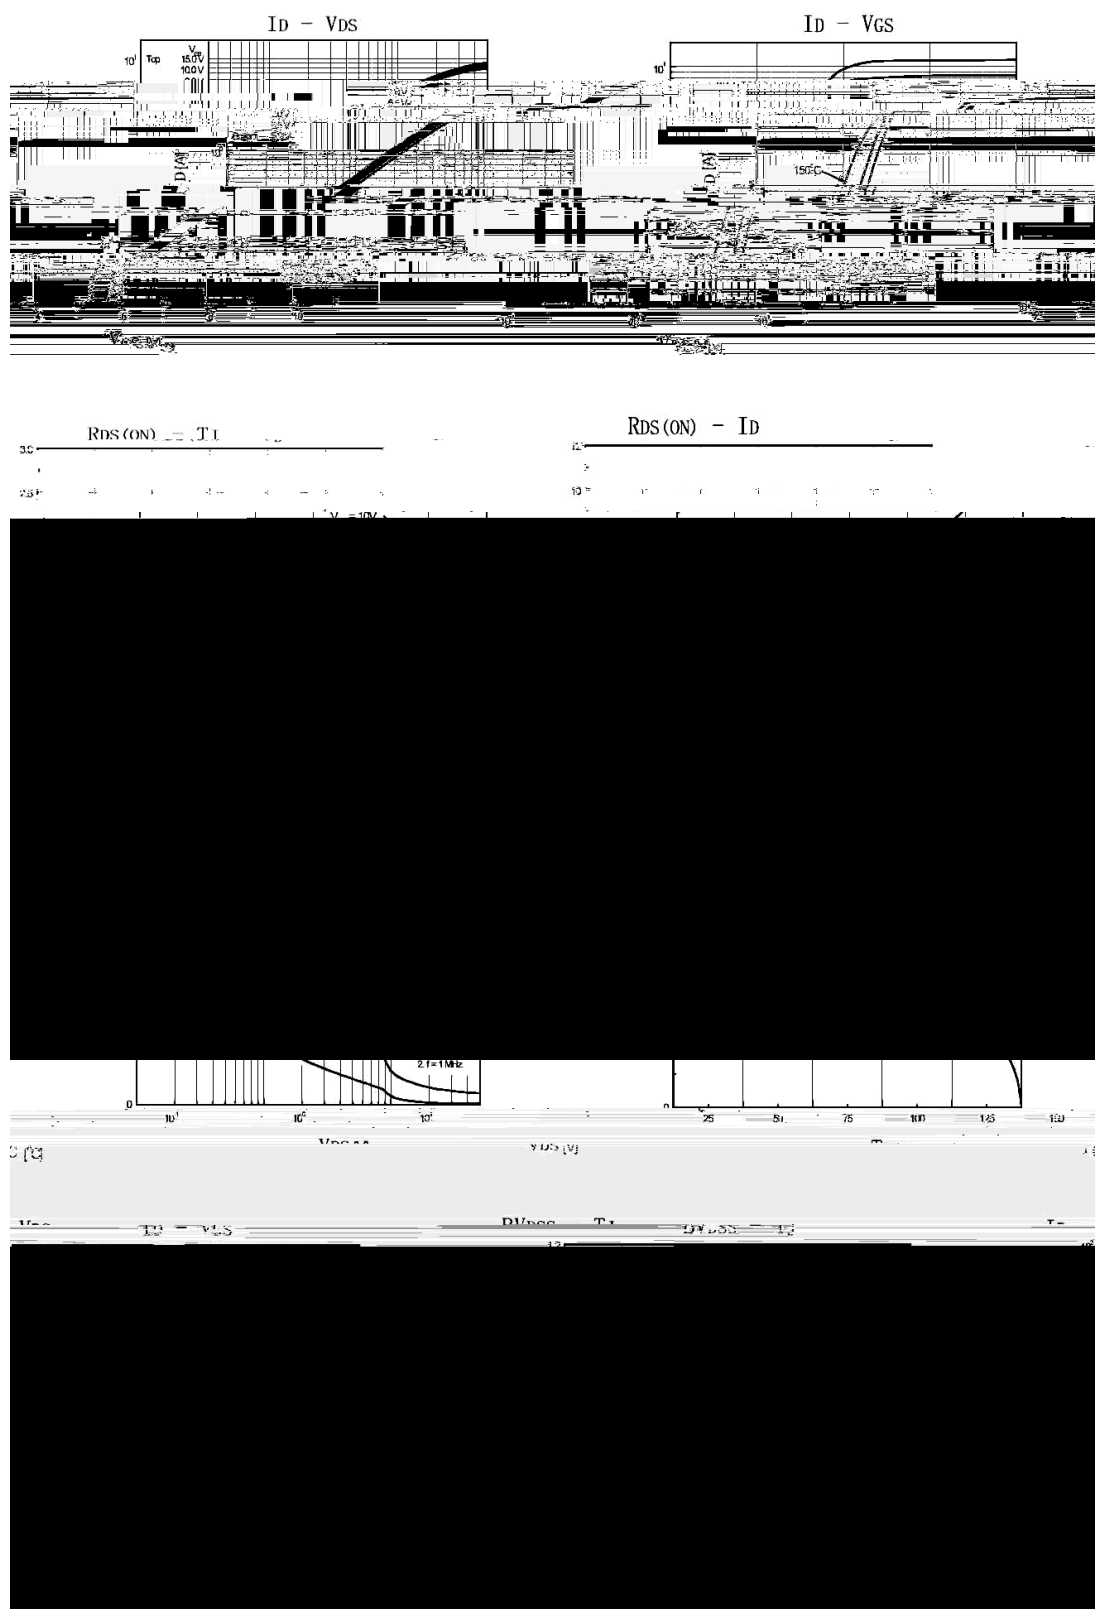

/ Package Dimensions

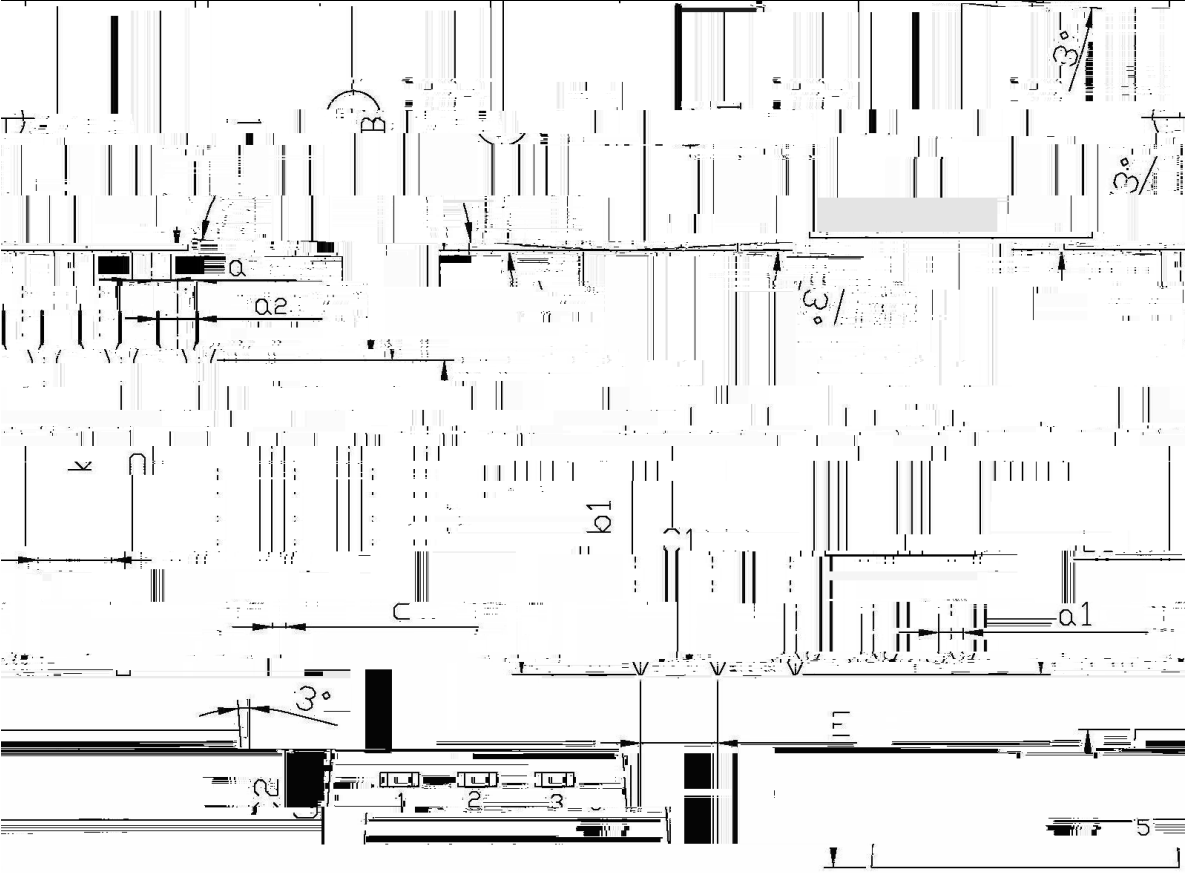

Dimensions in Millimeters				Dimensions in Millimeters			
Max	Symbol	Min	Max	Symbol	Min	Max	Symbol
1.4	Δ	9.8	10.2	C	1.2	6.3	D
6.7	Δ	3.56	6.4	Δ	6.3	1.2	Δ
15.7	Δ	16.1	9.0	B1	9.4	1.2	Δ
8.6	Δ	8.6	8.6	Δ	8.6	1.2	Δ
1.45	Δ	1.45	1.45	Δ	1.45	1.2	Δ

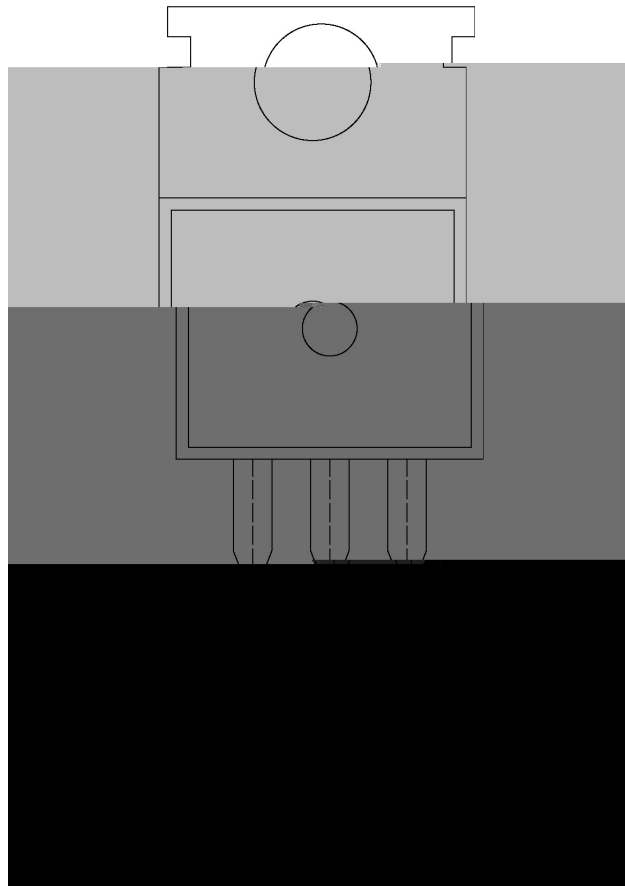

() / Temperature Profile for Dip Soldering(Pb-Free)

