



BRB7N60
Rev.D May.-2016

Parameter	Symbol	Rating	Unit
-----------	--------	--------	------


/ Electrical Characteristic Curve

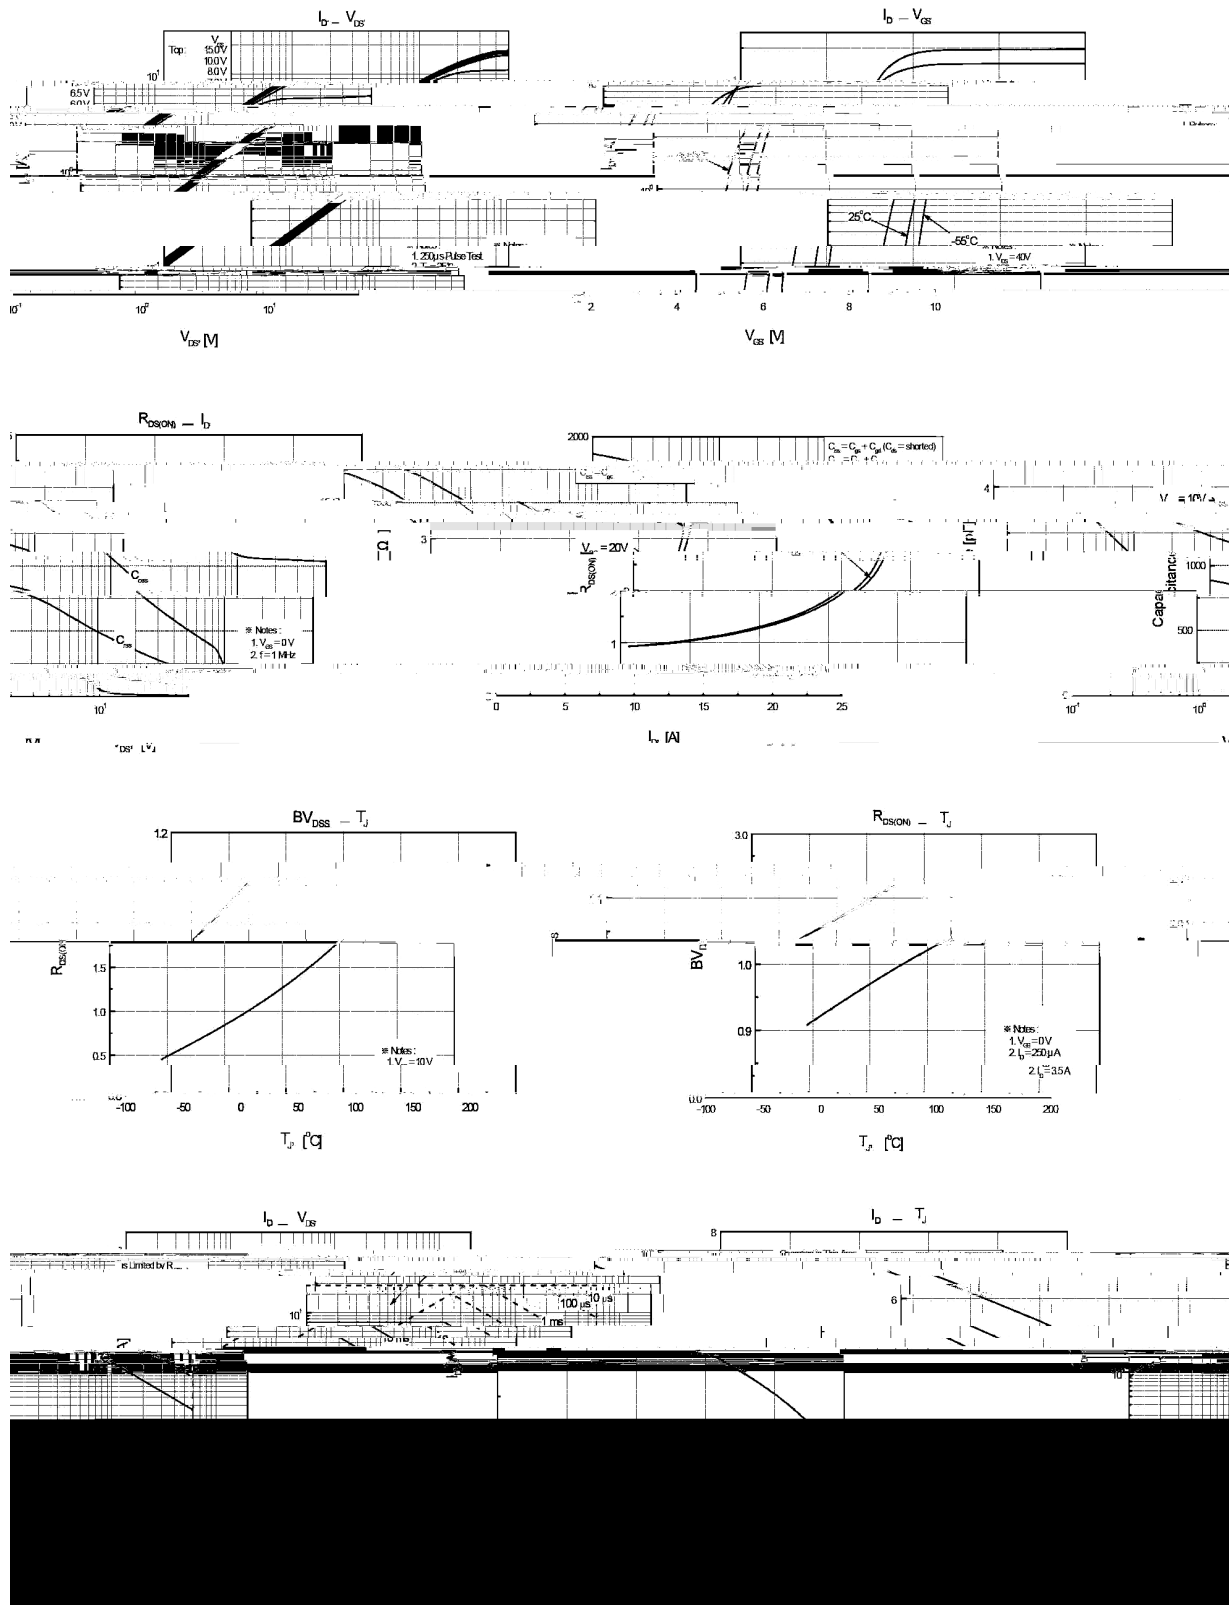

/ Package Dimensions

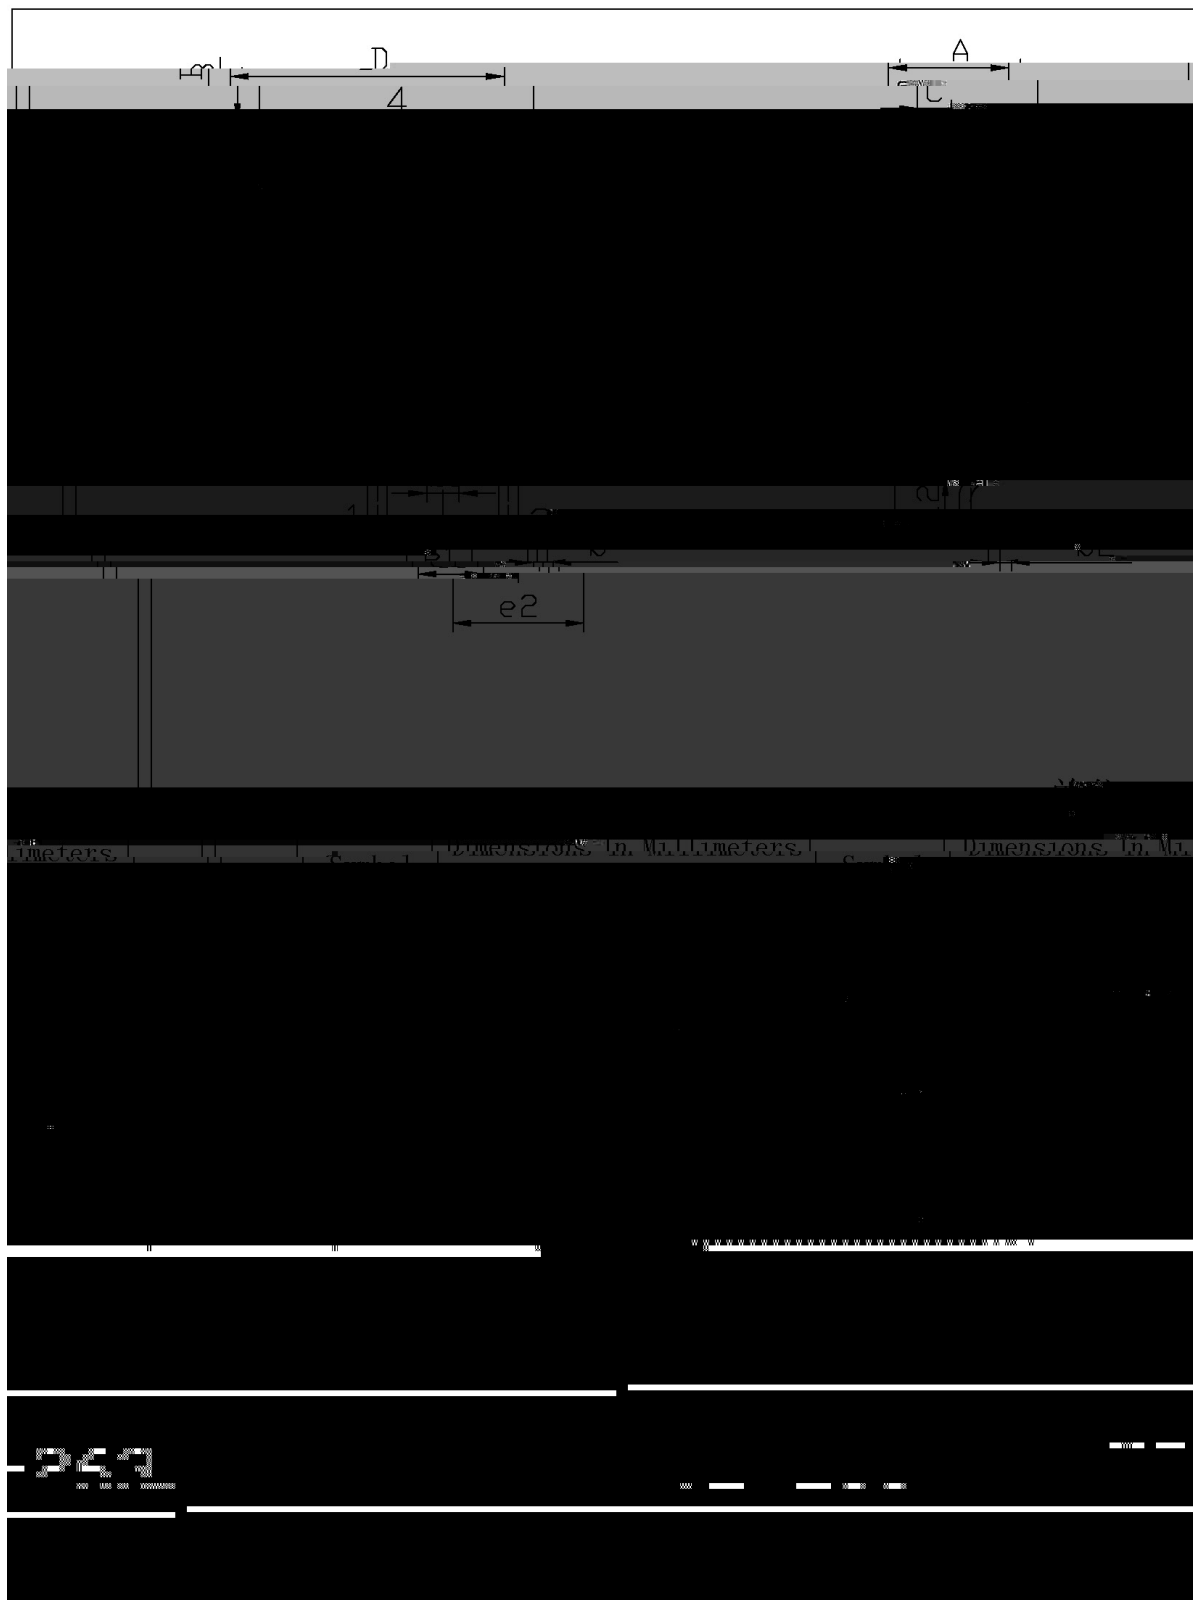

/ Marking Instructions

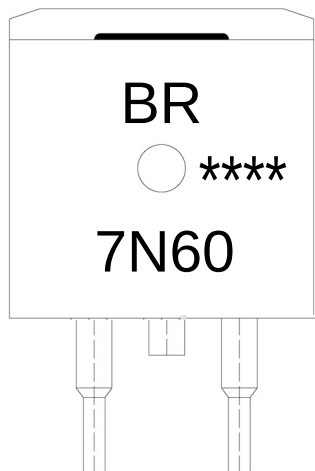

BR

7N60


Note:

BR: Company Code

7N60: Product Type.

****: Lot No. Code, code change with Lot No.

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

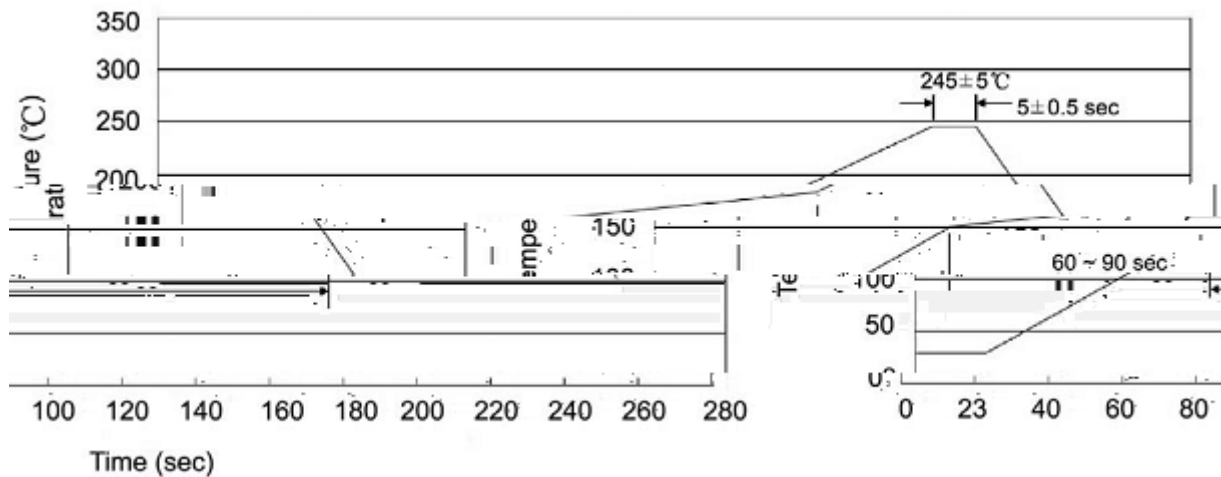

Note:

- | | | | | | |
|---|---------------------|------|------------------------|--------|---|
| 1 | 25 | 150% | 60 | 90sec; | 1.Preheating:25~150%, Time:60~90sec. |
| 2 | 245 ^{±5} % | | 5 ^{±0.5} sec; | | 2.Peak Temp.:245 ^{±5} %, Duration:5 ^{±0.5} sec. |
| 3 | | 2 | 10%/sec. | | 3. Cooling Speed: 2~10%/sec. |

/ Resistance to Soldering Heat Test Conditions

260^{±5}% 10^{±1} sec. Temp.:260±5 Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
TO-263	800	1	800	5	4,000	13 ×24	360×360×50	385×257×392

/ TUBE

Package Type	Units					Dimension (unit mm ³)		
	Units/Tube	Tubes/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Tube	Inner Box	Outer Box