

BRCO7330HME

CMOS

300mA

30V

CMOS


B AÃ ö 2‰ 'ñ À–Àl ¯đMđ•@‡` l Á ŷ 8'4 Đô v



`(•Ù €Đ L l Á ŷ ß v iđ©p


|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

|  |  |  |  |  |  |    |
|--|--|--|--|--|--|----|
|  |  |  |  |  |  |    |
|  |  |  |  |  |  | V  |
|  |  |  |  |  |  | V  |
|  |  |  |  |  |  | uA |
|  |  |  |  |  |  | uA |
|  |  |  |  |  |  | mA |
|  |  |  |  |  |  | mV |
|  |  |  |  |  |  | mA |
|  |  |  |  |  |  | V  |
|  |  |  |  |  |  | V  |

## / Functional Block Diagram



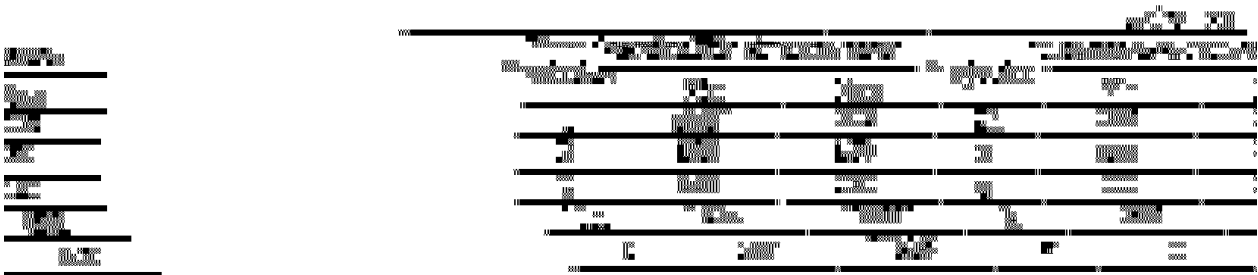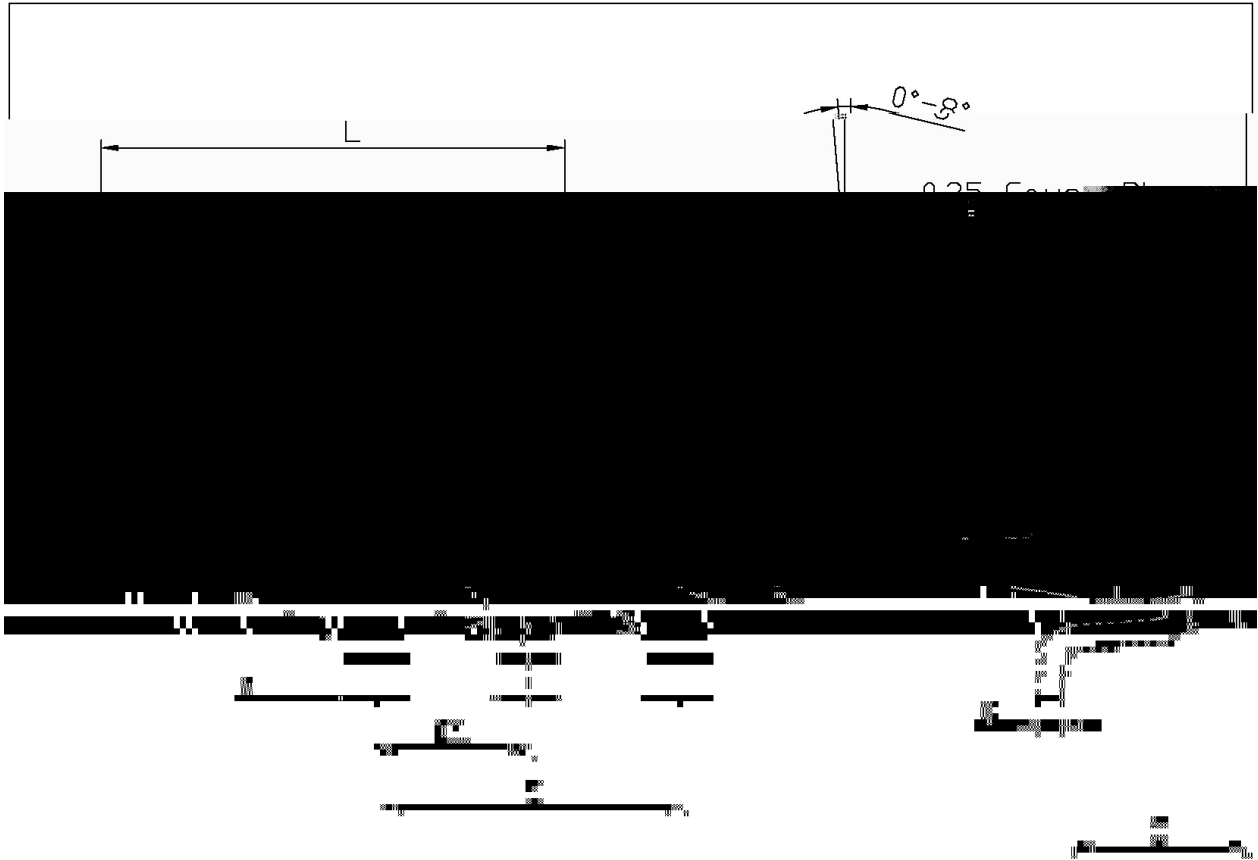


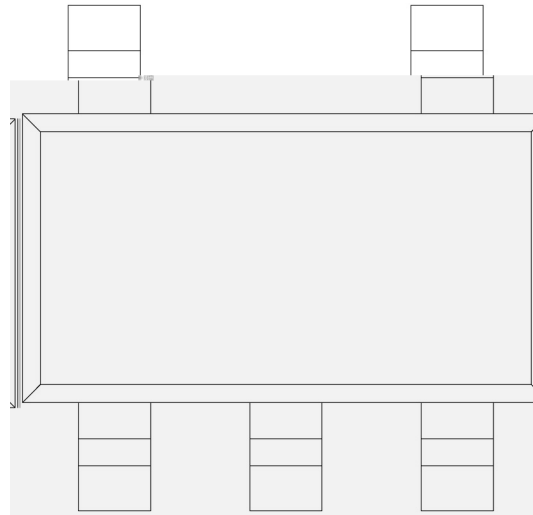

7330H

\*\*\*\*

Temperature Profile for IR Reflow Soldering(Pb-Free)

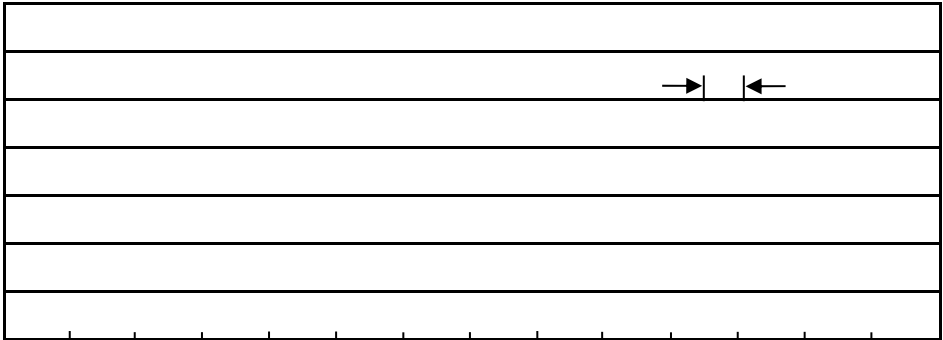

± ± ± ±

± ±

|  | Units/Reel<br>/ | Reels/Inner Box<br>/ | Units/Inner Box<br>/ | Inner Boxes/Outer Box<br>/ | Units/Outer Box<br>/ | Reel | Inner Box | Outer Box |
|--|-----------------|----------------------|----------------------|----------------------------|----------------------|------|-----------|-----------|
|  |                 |                      |                      |                            |                      |      |           |           |