



! / Revised record

A			W01		



& ' / Descriptions

800V 2.0A SMB
7%3084 # 95%&+ 7%, 3081+ 45 3: 4+;0; 3< 31 # =5+8? -@))=<A53 / 83B# C%33 &+(!)"<# 7 9D#
,84E8? !#
#

() / Features

2011/65/EU RoHS
F>811#G811; 8+ B#C*; ,#7%, 3081+3 31 #3 45 3:#+;6 H 8B#03 #,ǈ ,>: # / ;+*# I J# 0K7#
()LL.MN. I J#B;3 4+; 1<A53#1%3084 # 65%&+ B#8 , ,>;48+;5&1<K8>5? # ,35B%4+!


* + / Applications

F & 38># , %3 ,51 !#
#

, - . / 0 1 / Equivalent Circuit



2 3 4 5 / Pinning



" # \$ % / Marking#

7 # 9 83E; & ?#0&1+3%4+;5&1#

ES2KB

!"#\$%&'()*##### DATA SHEET




#

@ A B C ? / Package Dimensions

#

SMB

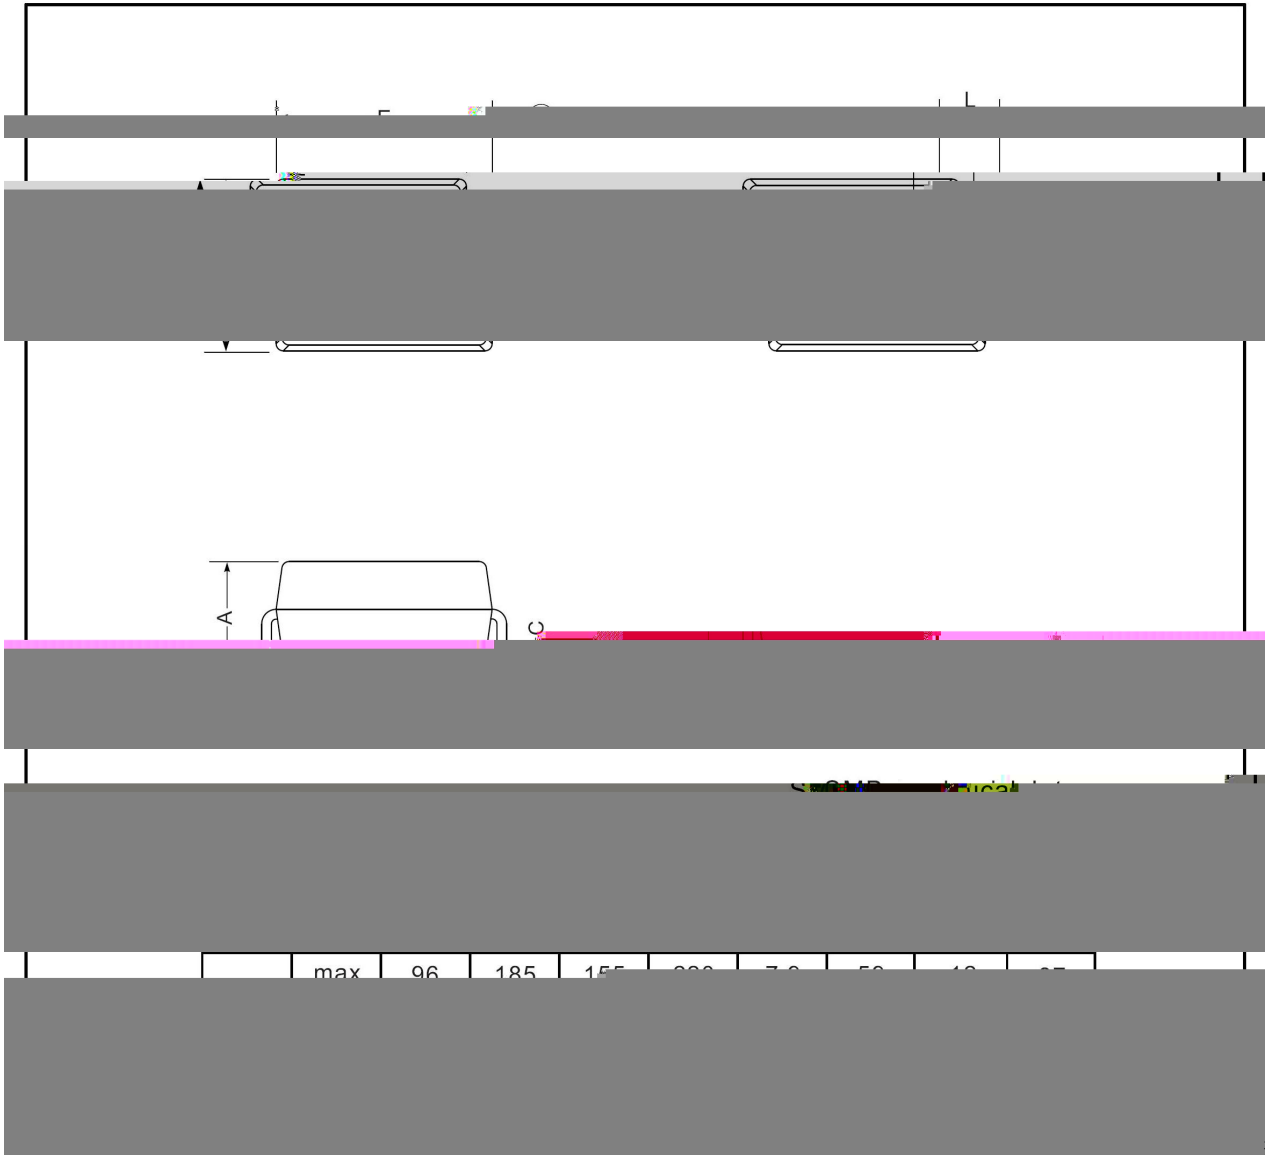

#




#

" # D E / Marking Instructions #

#

#

#

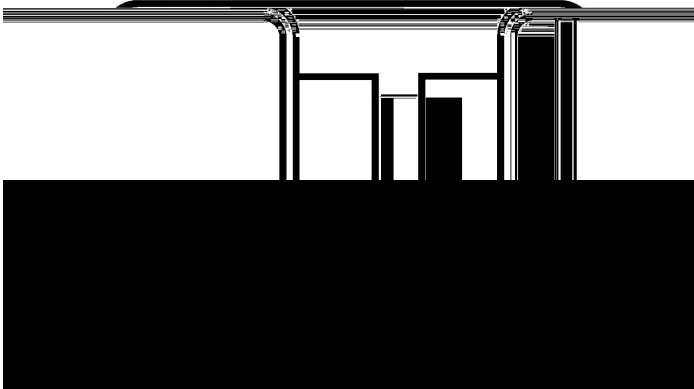

#

#

#

#

#

#

#

#

#

)

* + ,)

- ./0 ,) 1 2 ! 3 4)

**** ,) 1 5 6 7 ! 8 9 4 : ; < = F1 > ? 3 4 : @ A B = F1 C ? D 7 ! 3 4)

))

^5+ -#

- ./0

ES2KB